

Linear T5HE/HO

L24T5HO/8XX/9G-EB-AC

Commercial Grade LED T5 Lamp

Descriptions:

The RetroFlex (Type A) LED lamps provide hassle-free installation with simple lamp-for-lamp replacements for your linear fluorescent T5HE or T5HO retrofit needs. Fully certified to replace original fluorescent lamps, these lamps provide the perfect, hassle-free solution for whatever the project requires. When being used with an instant start, programmed start, or emergency backup ballast, no fixture re-wiring is needed.




Features & Benefits:

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- Compatible with controls and sensors
- No Mercury, No UV
- Works in cold temperature applications
- Full Glass Design
- Wide View Angle, 120
- 5 Year Warranty

Specifications:

Ordering Code	Length (in)	Lamp Wattage	System Wattage	CCT (K)	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life (hr)
L24T5HO/830/9G-EB-AC	24 in	9W	12W	3000K	960	83	240	106	80	50000
L24T5HO/835/9G-EB-AC	24 in	9W	12W	3500K	960	83	240	106	80	50000
L24T5HO/840/9G-EB-AC	24 in	9W	12W	4000K	960	83	240	106	80	50000
L24T5HO/850/9G-EB-AC	24 in	9W	12W	5000K	960	83	240	106	80	50000

Wiring Diagram:

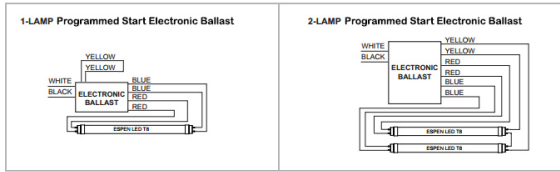

DLC Listing:

Ordering Code	DLC Product ID	DLC Product Model	DLC Version
L24T5HO/830/9G-EB-AC	N/A	N/A	N/A
L24T5HO/835/9G-EB-AC	N/A	N/A	N/A
L24T5HO/840/9G-EB-AC	N/A	N/A	N/A
L24T5HO/850/9G-EB-AC	N/A	N/A	N/A

- Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.
- Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.