THE POWER TO CREATE BETTER LIGHT ™

Linear T5HE/HO

L48T5HO/8XX/24G-EB

Commercial Grade LED T5 Lamp



Descriptions:

The RetroFlex (Type A) LED lamps provide hassle-free installation with simple lamp-for-lamp replacements for your linear fluorescent T5HE or T5HO retrofit needs. Fully certified to replace original fluorescent lamps, these lamps provide the perfect, hassle-free solution for whatever the project requires. When being used with an instant start, programmed start, or emergency backup ballast, no fixture re-wiring is needed.

Features & Benefits:

- No rewiring needed
- Works with fluorescent electronic T5 ballast
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing T5 sockets
- Compatible with controls and sensors
- No Mercury, No UV
- Works in cold temperature applications
- Full Glass Design
- Super Wide View Angle, 240
- 5 Year Warranty


Copyright © 2008-2024. All Rights Reserved
12257 Florence Ave. | Santa Fe Springs. CA 90670
Toll Free: (866) 933-7736 | Tel.: (562) 529-2938 | Fax: (562) 529-2978
Email: info@espentech.com | www.espentech.com

THE POWER TO CREATE BETTER LIGHT ™

Specifications:

Ordering Code	Length (in)	Lamp Wattage	System Wattage	CCT (K)	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life (hr)
L48T5HO/830/24G-EB	48 in	24W	27W	3000K	3100	83	240	129	115	50000
L48T5HO/835/24G-EB	48 in	24W	27W	3500K	3100	83	240	129	115	50000
L48T5HO/840/24G-EB	48 in	24W	27W	4000K	3200	83	240	133	118	50000
L48T5HO/850/24G-EB	48 in	24W	27W	5000K	3200	83	240	133	118	50000

Wiring Diagram:

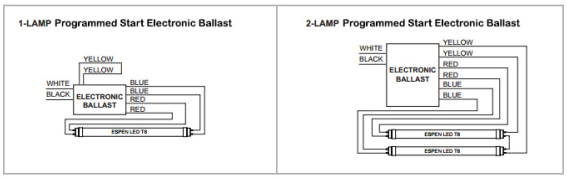

DLC Listing:

Ordering Code	DLC Product ID	DLC Product Model	DLC Version
L48T5HO/830/24G-EB	PLWIPVXQGYNW	L48T5HO/830/24G-EB(-aa)	5.1
L48T5HO/835/24G-EB	PLYVSXVM5FPY	L48T5HO/835/24G-EB(-aa)	5.1
L48T5HO/840/24G-EB	PLTCO057BNCL	L48T5HO/840/24G-EB(-aa)	5.1
L48T5HO/850/24G-EB	PLSIQWFR23O1	L48T5HO/850/24G-EB(-aa)	5.1

- Please refer to "Ballast Compatibility List" for compatible battery backup and/or emergency ballasts.
- Please refer to "Ballast Compatibility List" on Related Downloads.

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

Copyright © 2008-2024. All Rights Reserved
12257 Florence Ave. | Santa Fe Springs. CA 90670
Toll Free: (866) 933-7736 | Tel.: (562) 529-2938 | Fax: (562) 529-2978
Email: info@espentech.com | www.espentech.com