





VETR480/277-375VA	
<b>Description:</b>	480/347V to 277/200V, 375VA transformer
<b>Input Voltage:</b>	480V/347V
<b>Output Voltage:</b>	277V/200V

### PRODUCT FEATURES

- Non-Isolated Autotransformer
- UL Listed
- Thermally Protected (auto reset)
- Max Casing Temperature 105°C
- Sound rated A
- 5 year limited warranty
- Designed for lighting applications
  - LED
  - Electronic ballasts
  - HID
- Low profile cases

### APPLICATION NOTES

- Supply current frequency 60Hz
- Do not use on ungrounded systems

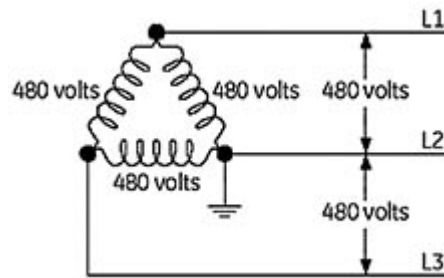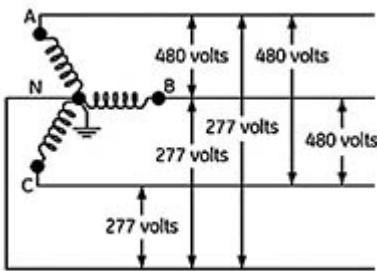


### PRODUCT SPECIFICATION

### STEP DOWN TRANSFORMER

Order Code	Input Voltage	Power Factor	Output Voltage	Max. Output Power
VETR480/277-375VA	480V/347V	0.96	277V/200V	375/270VA

### Physical Parameters

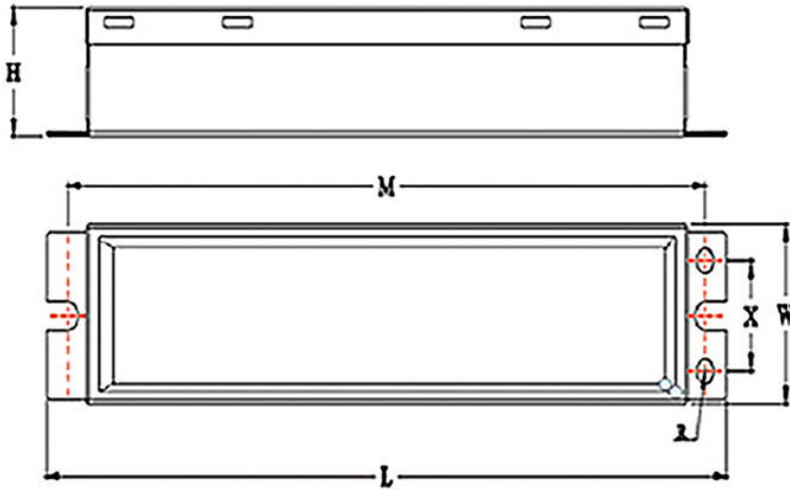

Description	Length
L	11.70 inches
M	11.14 inches
W	1.73 inches
X	1.06 inches
H	1.30 inches
R	1.30 inches
Lead	14 inches (16AWG)

### Wiring Diagram

